


Lionweld Kennedy grating is manufactured in standard stock sizes. These panels are then fabricated to suit specific applications.

## Standard Steel Panels Sizes

- Safegrid 6m x 1m (nominal)
- Safety Grating 6m x 1m (nominal)
- Safelock 3m x 1m (nominal)
- Safetread / Diamond Pattern 3m x 0.8m

**Note:** Safegrate, Safedeck & Stanweld are manufactured to suit.

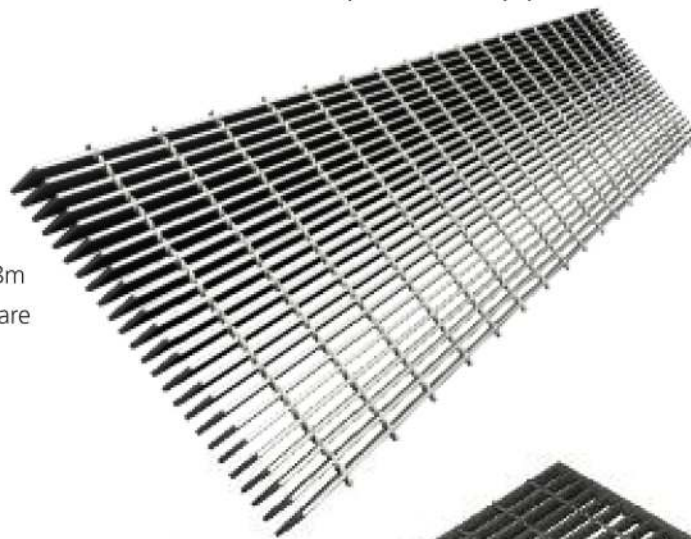

## Cut and Bind

- a** Standard width panels
- b** Runs of panels can have 1 no. made to width panel i.e. a panel which is smaller or bigger than the standard width to make up the walkway overall length
- c** No cut-outs or panel notching
- d** Panel ends bound with binding bars of the same depth as the bearing bars
- e** Toe plate can replace binding bars at additional cost
- f** Most cost effective fabrication



## Simple Layout

- a** Generally standard width panels, but areas supplied with non-standard widths to suit application
- b** Nominal amounts of panel shaping and cut-outs
- c** Panel ends and cut-outs bound with binding bars of the same depth as the bearing bars
- d** Toe plate can replace binding bars at additional cost



## Annular / Complex Layout

- a** Generally standard width panels, but areas supplied with non-standard widths to suit application
- b** Large amounts of panel shaping and cut-outs
- c** Panel ends and cut-outs bound with binding bars of the same depth as the bearing bars
- d** Toe plate can replace binding bars at additional cost

